




COMMERCIAL DUTY


Engine Driven General Purpose Portable Pumps

**Die-Cast Aluminum or Cast Iron,
Self-Priming Engine Driven Pumps
with B&S or Honda Gasoline or
Yanmar Diesel Engines**

- Horsepower 3.5 to 6.5
- 1-1/2" to 3" Port Sizes
- Die-Cast Aluminum or Cast Iron
- Max. Flow: 100 to 300 GPM
- Max. Head: 88 to 106 ft.
- Max. Solids Handling: 1/2" to 3/4"
- Max. Lift: 26'
- Silicon Carbide Seal with Dry Run Survivability
- Optional Viton® Elastomers
- Optional Wheel Kit

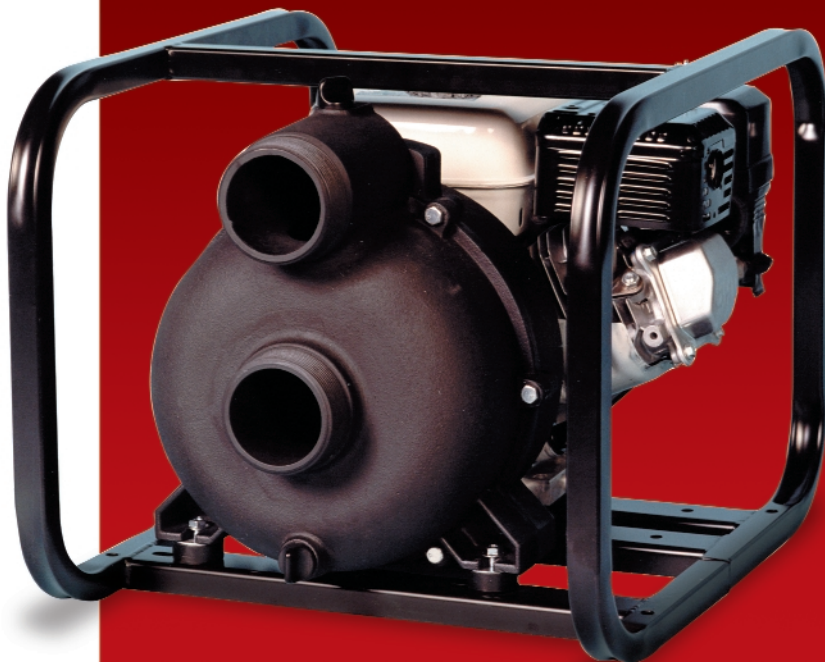

Model 3G5HCR

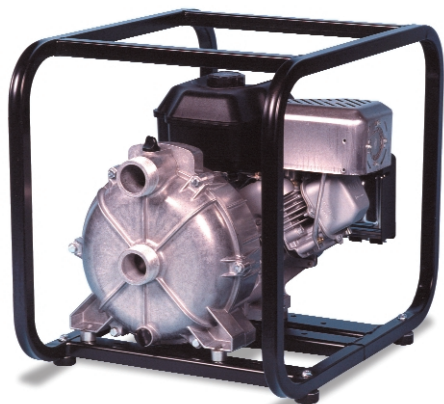


Model 2G5AR



Lightweight Self-Priming Pumps are available with several options including die-cast aluminum, or cast iron housing with G-Ruff Coat Teflon®. Roll cage, wheel kit, and a wide choice of standard or heavy duty engines for both gasoline and diesel fuels. All models (except Honda and Yanmar powered models) carry "Made in U.S.A." labeling

*Viton® and Teflon® are registered trademarks of DuPont

Performance of General Purpose Pumps

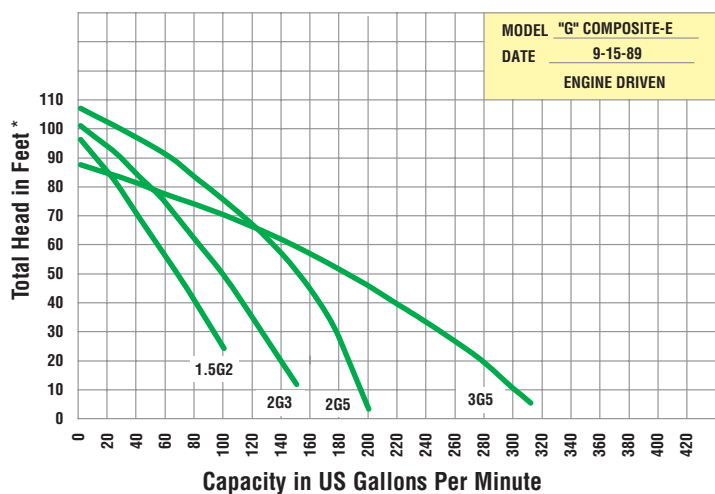

General Purpose Portable Pumps

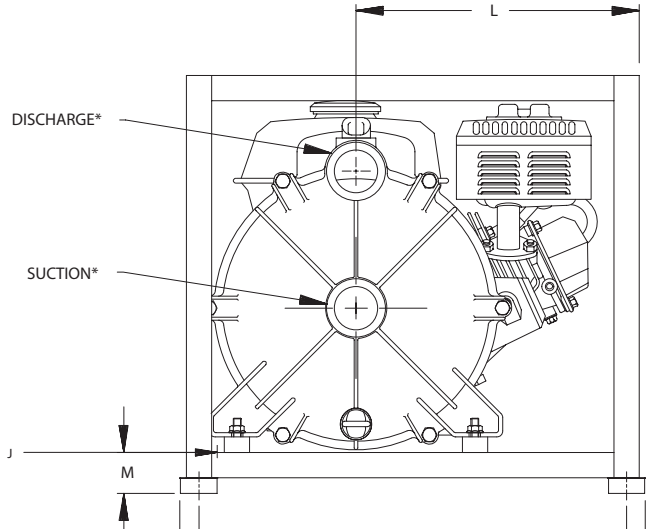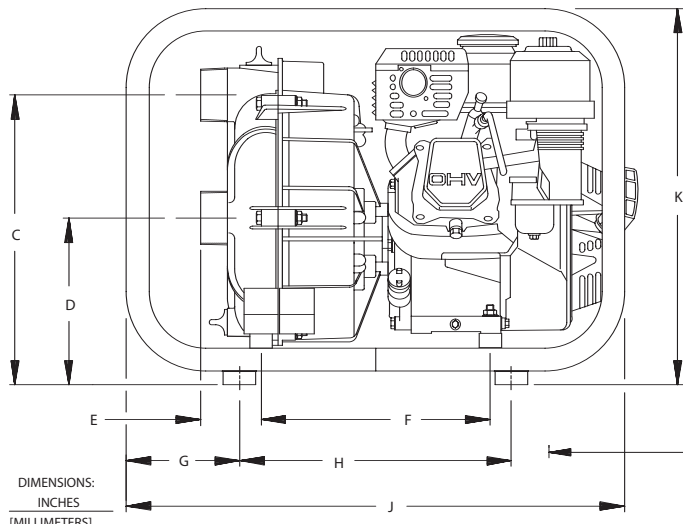

MODEL	A	B	C	D	E	F	G	H	J	K	L	M	DISCH*	SUCT*
1.5G2	18.50 [469,9]	17.00 [431,8]	12.81 [325,4]	7.38 [187,4]	2.67 [67,8]	10.19 [258,8]	5.00 [127,0]	15.00 [381,0]	25.00 [635,0]	16.62 [422,1]	11.36 [288,5]	1.62 [41,1]	* 1.50	* 1.50
2G3	18.50 [469,9]	17.00 [431,8]	12.81 [325,4]	7.38 [187,4]	2.67 [67,8]	10.19 [258,8]	5.00 [127,0]	15.00 [381,0]	25.00 [635,0]	16.62 [422,1]	11.36 [288,5]	1.62 [41,1]	** 2.00	** 2.00
2G5	18.50 [469,9]	17.00 [431,8]	12.81 [325,4]	7.38 [187,4]	2.83 [71,9]	10.29 [261,4]	5.00 [127,0]	15.00 [381,0]	25.00 [635,0]	16.62 [422,1]	11.36 [288,5]	1.62 [41,1]	** 2.00	** 2.00
3G5	18.50 [469,9]	17.00 [431,8]	13.40 [340,4]	7.38 [187,4]	5.22 [132,6]	10.12 [257,0]	5.00 [127,0]	15.00 [381,0]	25.00 [635,0]	16.62 [422,1]	11.36 [288,5]	1.62 [41,1]	** 3.00	** 3.00

(*) STANDARD NPT (FEMALE) PIPE THREAD.

(**) STANDARD NPT (MALE) PIPE THREAD.

1.5" Gen. Purpose Dewatering

Alum. Model #	Alum. Ship Wt. (lbs.)	Driver Type & HP	Seal Type & Elastomer/Faces	Tank Size (Qts.)	Run Time	Mounting
1.5G2A	58	B&S 3.5 hp Std	Viton®*/Sic/Sic	3	2.5	Handle
1.5G2I	58	B&S 3.5 hp Ind	Viton®*/Sic/Sic	3	2.5	Handle
1.5G2H	58	Honda 4 hp	Viton®*/Sic/Sic	2.64	2.25	Handle

2" Gen. Purpose Dewatering

Alum. Model #	Alum. Ship Wt. (lbs.)	Cast Iron Model #	Cast Iron Ship Wt. (lbs.)	Driver Type & HP	Seal Type & Elastomer/Faces	Tank Size (Qts.)	Run Time	Mounting
2G3AR	72	2G3ACR	94	B&S 3.5 hp Std	Viton®*/Sic/Sic	3	2.5	Roll Cage
2G3IR	80	2G3ICR	102	B&S 3.5 hp Ind	Viton®*/Sic/Sic	3	2.5	Roll Cage
2G3HR	76	2G3HCR	98	Honda 4 hp	Viton®*/Sic/Sic	2.64	2.25	Roll Cage
2G5AR	86	2G5ACR	100	B&S 5.5 hp OHV	Viton®*/Sic/Sic	3	1.4	Roll Cage
2G5IR	86	2G5ICR	108	B&S 6.5 hp Pro	Viton®*/Sic/Sic	4	2	Roll Cage
2G5HR	82	2G5HCR	104	Honda 5.5 hp	Viton®*/Sic/Sic	3.88	2	Roll Cage
2G5YR	103	2G5YCR	125	Yanmar 4.7 hp	Viton®*/Sic/Sic	2.6	1.8	Roll Cage

3" Gen. Purpose Dewatering

Alum. Model #	Alum. Ship Wt. (lbs.)	Cast Iron Model #	Cast Iron Ship Wt. (lbs.)	Driver Type & HP	Seal Type & Elastomer/Faces	Tank Size (Qts.)	Run Time	Mounting
3G5AR	88	3G5ACR	121	B&S 5.5 hp OHV	Viton®*/Sic/Sic	3	1.4	Roll Cage
3G5IR	96	3G5ICR	129	B&S 6.5 hp Pro	Viton®*/Sic/Sic	4	2	Roll Cage
3G5HR	92	3G5HCR	125	Honda 5.5 hp	Viton®*/Sic/Sic	3.88	2	Roll Cage
3G5YR	113	3G5YCR	146	Yanmar 4.7 hp	Viton®*/Sic/Sic	2.6	1.8	Roll Cage

*Viton® and Teflon® are registered trademarks of DuPont.



WARNING: Do not use in explosive atmosphere or for pumping volatile flammable liquids.
Viton® Elastomers including O-rings and check valve.
Two wheel truck assemblies with semi-pneumatic tires for pumps with roll cages.

The Gorman-Rupp Company reserves the right to discontinue any model or change specifications at any time without incurring any obligation.

5/8" Threaded Kit (Single)

Alum. Model #	Alum. Ship Wt. (lbs.)	Cast Iron Model #	Cast Iron Ship Wt. (lbs.)	Seal Type & Elastomer /Faces	Mounting
1.5G2	30	NA	-	Viton®*/Sic/Sic	Handle
2G3	30	2G3C	30	Viton®*/Sic/Sic	Handle
2G5	31	2G5C	31	Viton®*/Sic/Sic	Handle
3G5	39	3G5C	39	Viton®*/Sic/Sic	Handle

3/4" Keyed Kit (Single)

Alum. Model #	Alum. Ship Wt. (lbs.)	Cast Iron Model #	Cast Iron Ship Wt. (lbs.)	Seal Type & Elastomer /Faces	Mounting
2G3K	30	2G3CK	30	Viton®*/Sic/Sic	Handle
2G5K	31	2G5CK	31	Viton®*/Sic/Sic	Handle
3G5K	39	3G5CK	39	Viton®*/Sic/Sic	Handle

Standard Features

- Cast Iron Impeller and Cast Iron Volute
- Silicon Carbide, Self-Lubricated Seal with Graphite Impregnated Seat and Viton® Elastomers
- Large Pump Casing
- Built-In Check Valve
- Horizontal Discharge and Male Threaded Connections
- Choice of Briggs & Stratton Standard or Premium, Honda gas or Yanmar diesel Engines
- Optional Wheel Kit
- Strainer Supplied
- Rubber Foot Mounting