



COMMERCIAL DUTY

Engine Driven Portable Plastic Pump

Polypropylene, Self-Priming

- *Suction and Discharge Ports 2"*
- *Max. Flow: 173 GPM*
- *Max. Head: 130 ft.*
- *Max. Priming Lift: 26 ft.*
- *Choice of B&S OHV or Honda GC Engines*
- *Polypropylene construction with EPDM elastomers*
- *Viton® fitted Silicon Carbide self-lubricating mechanical seal with some dry run survivability*
- *Pump-out Vanes on back of Impeller*
- *Built-In Carrying Handle*
- *Stainless Steel Hardware*
- *2" Hi-Density polypropylene strainer standard*
- *Rubber Feet standard*




Model 2A3AK

Lightweight pumps for corrosive agriculture, industrial, construction, and marine applications. Polypropylene construction with EPDM elastomers, Viton® fitted Silicon Carbide self-lubricated seal. Built-in carry handle.

Optional Features: All Viton® Elastomers, Roll Cage, Wheel Kit (requires roll cage) This corrosion resistant lightweight self-priming pump with engine is shipped hose ready.

Performance of Plastic Pump



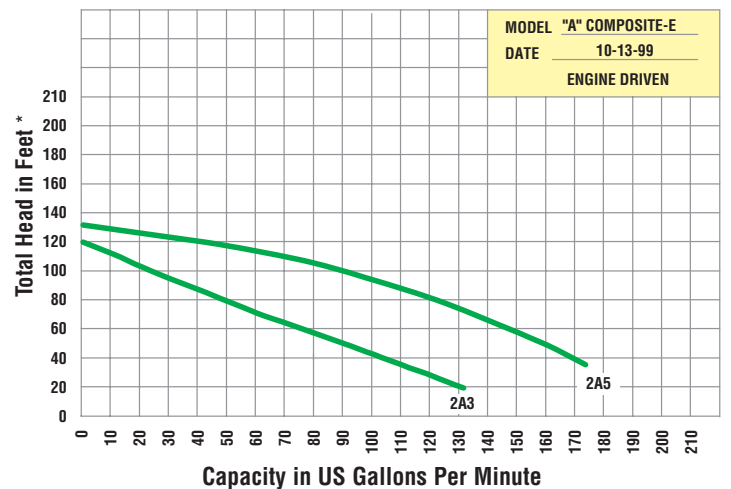


*Convert to PSI, divide by 2.31

Liquid-Water specific gravity 1.0

Portable Plastic Pump

Model No.	Description/ Type of Pump	Ship Wt (lbs.)	Driver Type & HP	Port size Suc x dis (NPT)	Basic Construction	Seal Type & Elastomer/ Faces	Tank Size (Qts.)	Run time	Roll Bar Frame
2A3AK	Plastic Pump- Polypropylene	50	B&S 3.5 hp Std	2"	Polypropylene	Sil Carb/Mech	3	2.5	Handle
2A3AKR	Plastic Pump- Polypropylene	63	B&S 3.5 hp Std	2"	Polypropylene	Sil Carb/Mech	3	2.5	Roll Cage
2A5AK	Plastic Pump- Polypropylene	50	B&S 5.5 hp OHV	2"	Polypropylene	Sil Carb/Mech	3	1.4	Handle
2A5AKR	Plastic Pump- Polypropylene	63	B&S 5.5 hp OHV	2"	Polypropylene	Sil Carb/Mech	3	1.4	Roll Cage
2A5HK	Plastic Pump- Polypropylene	48	Honda 5 hp GC	2"	Polypropylene	Sil Carb/Mech	1.82 pt.	1.4	Handle
2A5HKR	Plastic Pump- Polypropylene	61	Honda 5 hp GC	2"	Polypropylene	Sil Carb/Mech	1.82 pt.	1.4	Roll Cage
2A5K	Kit	9		2"	Polypropylene	Sil Carb/Mech			
2A5PK	Pedestal Drive	18		2"	Polypropylene	Sil Carb/Mech			

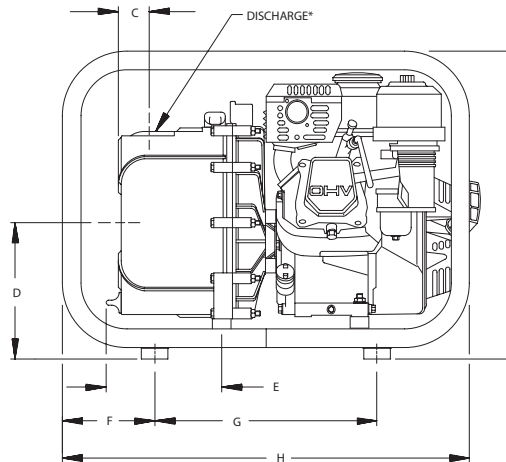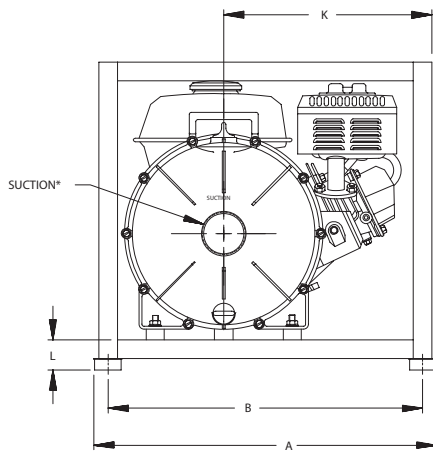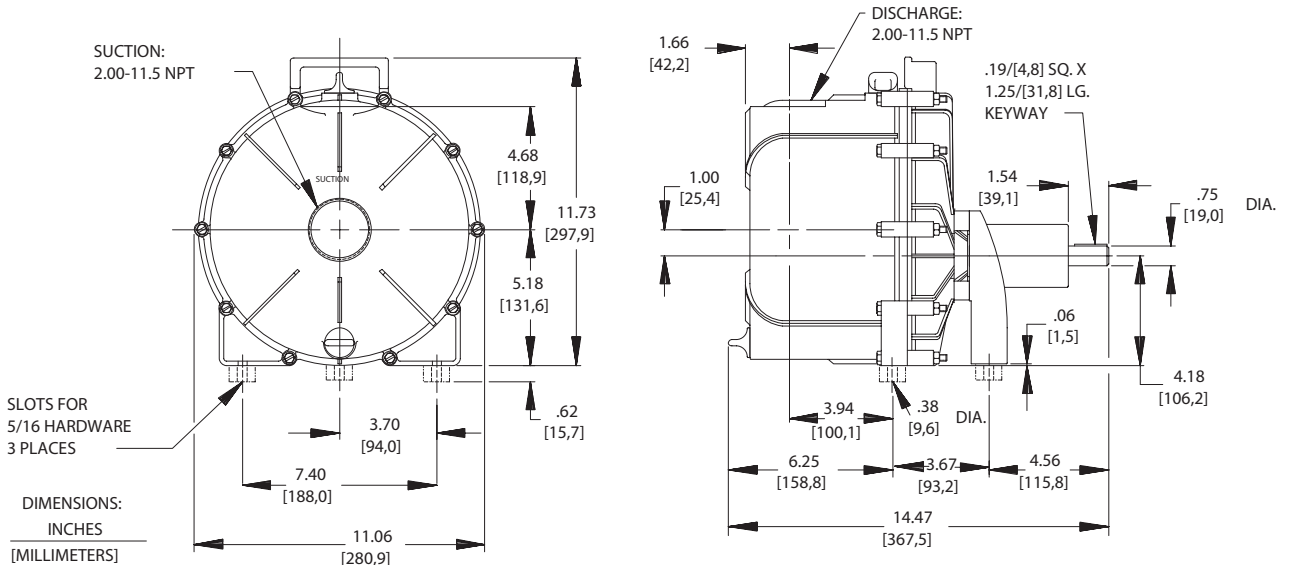

PLASTIC PEDESTAL PUMP
2A5PK

Standard Features

- Viton®* fitted Silicon Carbide self-lubricating mechanical seal with some dry run survivability
- Stainless Steel Hardware
- Built-In Carrying Handle
- Pump-out Vanes on back of Impeller
- One 90° 2" polypropylene elbow standard
- Two 2" polypropylene short nipples standard
- 2" Hi-Density polypropylene strainer standard
- Rubber Feet standard

*Viton® is a registered trademark of DuPont

WARNING: Do not use in explosive atmosphere or for pumping volatile flammable liquids.

MODEL	A	B	C	D	E	F	G	H	J	K	L	DISCH*	SUCT*
ALL	18.50 [469,9]	17.00 [431,8]	1.66 [42,2]	7.38 [187,4]	6.25 [158,8]	5.00 [127,0]	15.00 [381,0]	25.00 [635,0]	16.62 [422,1]	11.36 [288,5]	1.62 [41,1]	* 2.00	* 2.00

(*) STANDARD NPT (FEMALE) PIPE THREADS.

PLASTIC ENGINE DRIVEN PUMP