

Bellows Metering Pumps


1.5" Bel O Just® Pumps, Single 1.5" Compact Bellows Pumps

- *Repeatability from stroke-to-stroke to +/- 0.5%*
- *Dry run capability*
- *Self-priming*
- *No dynamic seals*
- *Superior corrosion resistance*
- *Long, maintenance free operation*
- *Simple flow adjustment*
- *Maximum flow 945 ml per minute*
- *Maximum pressure 20 PSI*
- *Maximum temperature 140° F*




Model 14251-005 S

Bellows metering pumps operate on a positive displacement principle. The rotation of the motor shaft is transmitted into a reciprocating motion through a lever pivot crank mechanism. This motion provides a continuous squeezing and relaxing force on a bellows module, forcing fluid in and out of the module. Pumps are designed to displace both corrosive and noncorrosive fluids. Accurate to +/- 0.5% from stroke to stroke, when pump is set 50% to 100% of full stroke. Discharge pressure is maintained over the entire flow range of the pump. Poppet valves are utilized to prevent backflow, preventing siphoning through the pump in applications where a positive suction head exists. Typical applications include film and x-ray processors, silver recovery systems, wafer and silicon chip washers and silicon chip washers and processors, detergent dispensers, blood analyzing equipment, industrial floor scrubbers, thermo therapy equipment, waste removal systems, and wastewater and water treatment systems

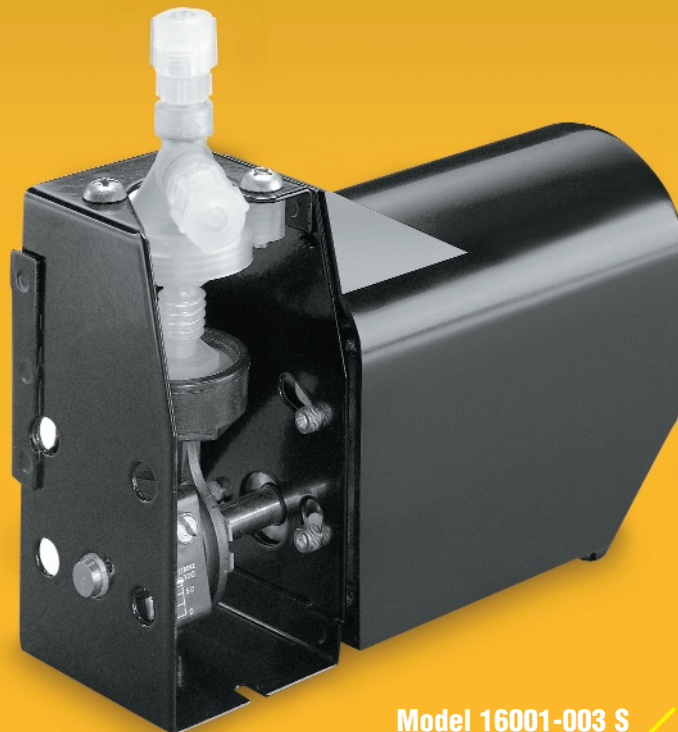


Model 16001-003 S

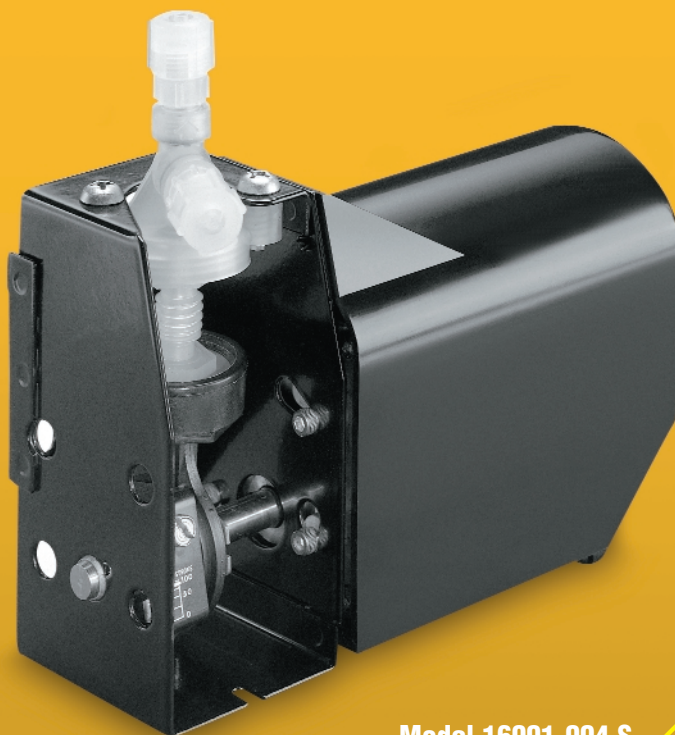


Model 16001-004 S

Bellows Metering Pumps

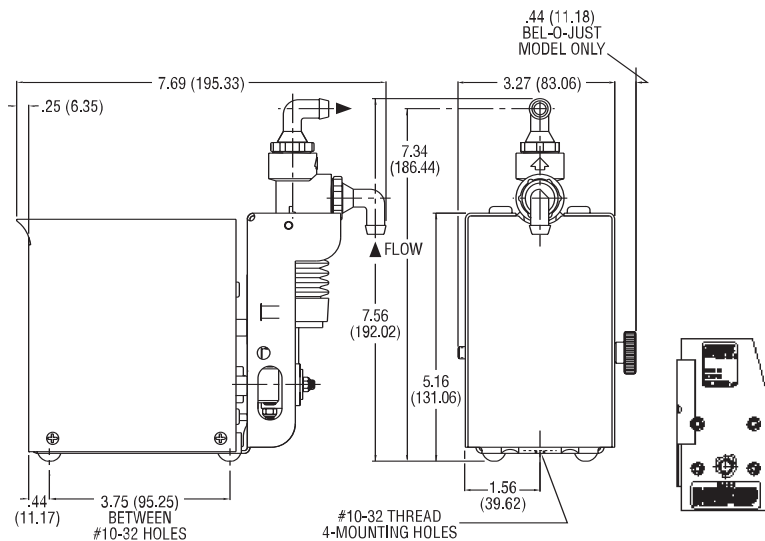


Model 14251-005 S

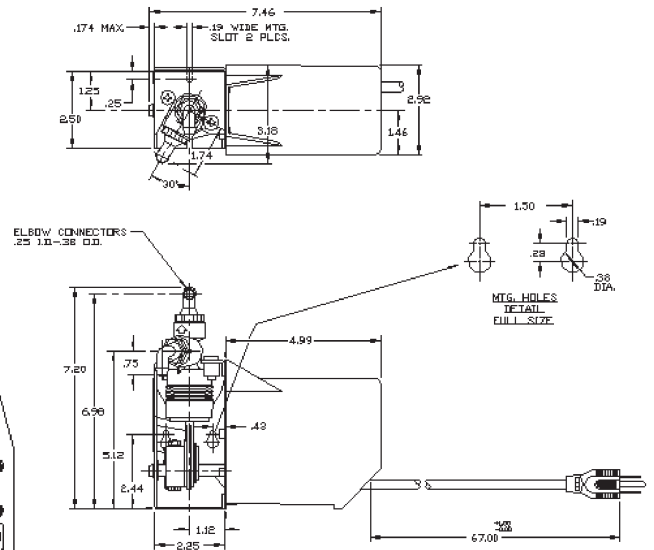

Model 16001-003 S

HOSE CONNECTORS NOT SHOWN IN THIS VIEW FOR CLARITY

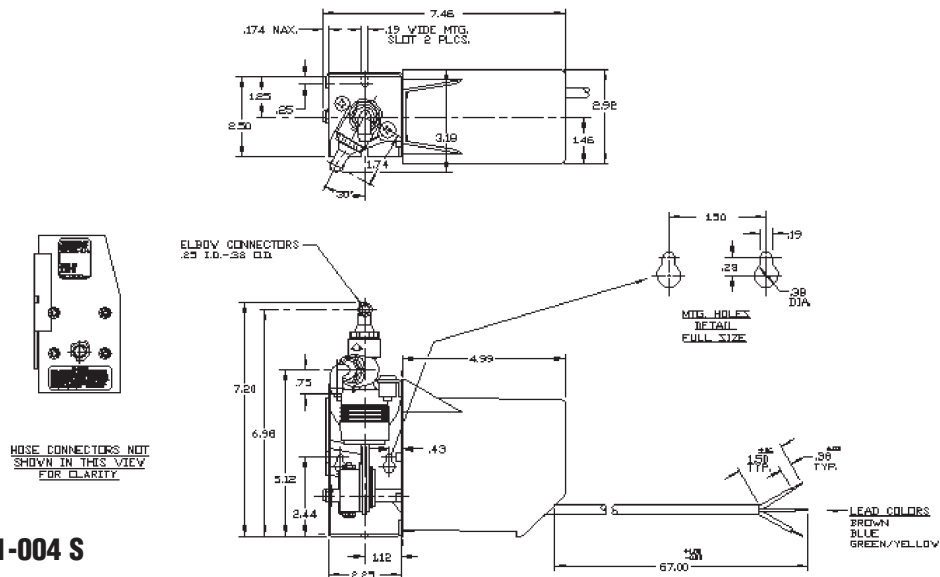

Model 16001-004 S

Catalog Number Stock No.	Description/ Type of Pump	Ship Wt (Lbs.)	Driver Type & HP	Port size Suc x dis (tube)	Basic Construction	Seal Type & Elastomer/ Faces	VAC	FL Amps	Motor Enclosure
14251-005 S	1.5" Bel O Just Bellows	5.5	Sub Frac/SP	.38"ID	Polypropylene	EPT	115	1.1	C-Frame
16001-003 S	1.5" Compact Bellows Pump	4.5	Sub Frac/SP	.38"ID	Polypropylene	EPT	115	1	C-Frame
16001-004 S	1.5" Compact Bellows Pump	3.8	Sub Frac/SP	.38"ID	Polypropylene	EPT	230	0.5	C-Frame

Standard Features

- Polypropylene construction
- EPT O-ring & Poppet Valves
- .38" Suction & Discharge
- Standard gearmotors in 115V 50/60Hz or 230V 50/60 Hz

WARNING: Do not use in explosive atmosphere or for pumping volatile flammable liquids.

The Gorman-Rupp Company reserves the right to discontinue any model or change specifications at any time without incurring any obligation.